

# VP-2421 incl

## POWER AMPLIFIER

The VP-2421 Power Amplifier features a 420 W-by-1 channels configuration, and uses the VP-200VX Power Amplifier Module per channel.



Article number: VP-2421 INCL  
Alternative products: VP-2421


### Specifications

Indicator	Channel power indicator: 4 channels, dual colour LED; Overheat indicator: Yellow LED
Power source.	28 V DC (operating range: 20 – 40 V DC) M4 screw terminal
Rated output.	1 x 420 W
Frequency response.	40 Hz - 16 kHz ( $\pm 3$ dB)
Distortion (value).	< 1 %
Power source.	28 V DC (operating range: 20 – 40 V DC) M4 screw terminal
Distortion.	< 1 % (at 1 kHz, rated input/output)
Current consumption (value)	7,6 A
Frequency response.	40 Hz - 16 kHz ( $\pm 3$ dB)
S/N ratio.	80 dB(A)
Inputs	Specified by input module VP-200VX
Outputs	Power amplifier output (speaker line): M3.5 screw terminal
Number of channels	1
Current consumption	7.6 A
Indicator	Channel power indicator: 4 channels, dual colour LED; Overheat indicator: Yellow LED
Distortion.	< 1 % (at 1 kHz, rated input/output)
Finish.	Steel plate, surface-treated, 30 % gloss, paint, black,


# VP-2421incl

POWER AMPLIFIER


Appearance

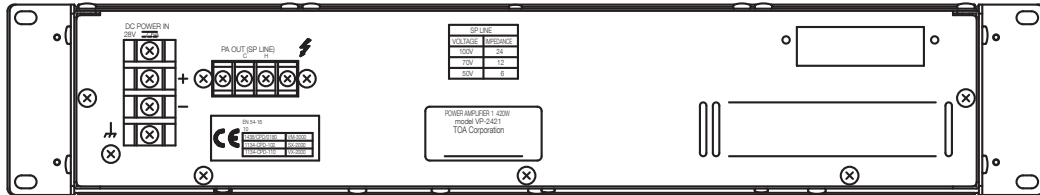

Rear View

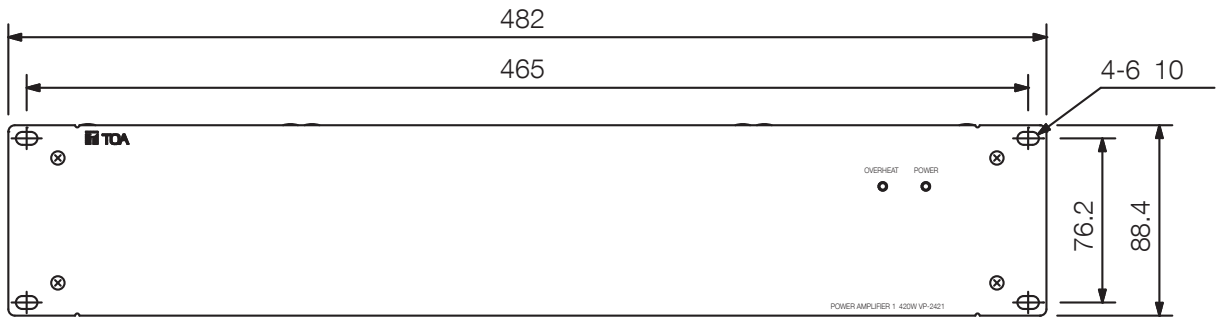

Front View

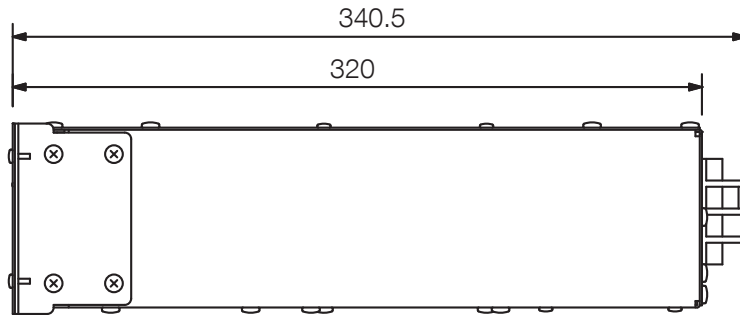

Side View

UNIT:mm

SCALE:1/4